

BBT6U

BBT12U

BBT40U

BBT80U

BBR6U

BBR16U



MODEL	BBT6U		
Cabinet Dimensions (WxDxH) mm	145	390	210
Packing Dimensions (WxDxH) mm	280	560	350
Packing type	Carton box		
Cabinet Weight (Kg)	4,1 (WITHOUT BATTERIES)		
Weight with packing (Kg)	6,1 (WITHOUT BATTERIES)		
Color	Black		
Battery type	12V 7/9 Ah		
N° Max Batteries	6		
Output Voltage available (V)	24 / 36		
Breaker	1 x 63A		
Power supply	NO		
Connection	Connector		
Accessories	UPS-Cabinet connection cable (55cm)		
Type of support	Vertical		
Mounting arrangement	Tower		


N.B. Max length of connection cable = 1,5 mt      Single battery weight 2/2,5Kg approximately



FRONT



REAR

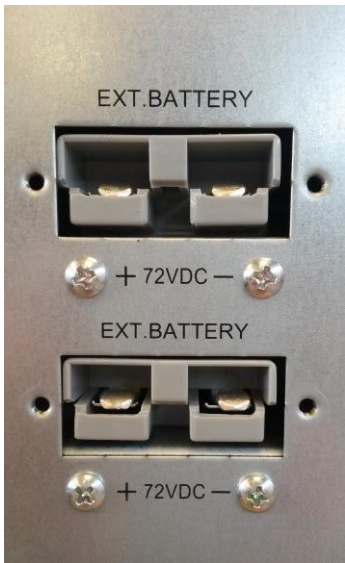

CONNECTION CONNECTORS

MODEL	BBT12U		
Cabinet Dimensions (WxDxH) mm	190	460	330
Packing Dimensions (WxDxH) mm	380	740	520
Packing type	Carton box		
Cabinet Weight (Kg)	7,7 (WITHOUT BATTERIES)		
Weight with packing (Kg)	12,2 (WITHOUT BATTERIES)		
Color	Black		
Battery type	12V 7/9 Ah		
N° Max Batteries	16		
Output Voltage available (V)	24 / 36 / 48 / 72		
Power supply	IEC socket (10A)		
Breaker	1 x 63A		
Connection	Connector		
Accessories	UPS-Cabinet connection cable (55cm)		
Type of support	Vertical		
Mounting arrangement	Tower		


N.B. Max length of connection cable = 1,5 mt      Single battery weight 2/2,5Kg approximately



FRONT



REAR

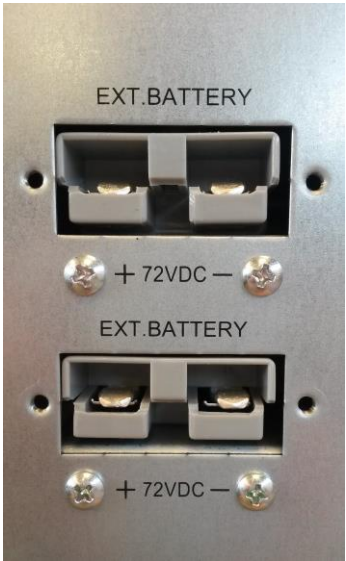

CONNECTION CONNECTORS

MODEL	BBT40U		
Cabinet Dimensions (WxDxH) mm	250	600	615
Packing Dimensions (WxDxH) mm	360	700	860
Packing type	Pallet		
Cabinet Weight (Kg)	31 (WITHOUT BATTERIES)		
Weight with packing (Kg)	41 (WITHOUT BATTERIES)		
Color	Black		
Battery type	12V 7/9 Ah		
N° Max Batteries	40		
Output Voltage available (V)	± 96/108/120/240		
Breaker	2 x 63A		
Connection	Terminal block		
Accessories	/		
Type of support	Wheels		
Mounting arrangement	Vertical		

N.B. Max length of connection cable = 1,5 mt      Single battery weight 2/2,5Kg approximately



FRONT



REAR



TERMINAL BLOCK and BREAKERS

MODEL	BBT80U		
Cabinet Dimensions (WxDxH) mm	250	830	865
Packing Dimensions (WxDxH) mm	380	950	1050
Packing type	Pallet		
Cabinet Weight (Kg)	55 (WITHOUT BATTERIES)		
Weight with packing (Kg)	71 (WITHOUT BATTERIES)		
Color	Black		
Battery type	12V 7/9 Ah		
N° Max Batteries	80		
Output Voltage available (V)	± 96/108/120/240		
Breaker	1 x 63A		
Connection	Terminal block		
Accessories	/		
Type of support	Wheels		
Mounting arrangement	Vertical		

N.B. Max length of connection cable = 1,5 mt      Single battery weight 2/2,5Kg approximately



FRONT



REAR



TERMINAL BLOCK and BREAKERS



MODEL	BBR6U		
Cabinet Dimensions (WxDxH) mm	440	430	86,5 (2U)
Packing Dimensions (WxDxH) mm	560	570	210
Packing type	Carton box		
Cabinet Weight (Kg)	7,1 (WITHOUT BATTERIES)		
Weight with packing (Kg)	9,6 (WITHOUT BATTERIES)		
Color	Black		
Battery type	12V 7/9 Ah		
N° Max Batteries	6		
Output Voltage available (V)	24 / 36		
Power supply	NO		
Breaker	NO		
Connection	Connector		
Accessories	Handles - Base support for vertical fix UPS-Cabinet connection cable (55cm)		
Type of support	Base support / Rack		
Mounting arrangement	Vertical / Horizontal		


N.B. Max length of connection cable = 1,5 mt      Single battery weight 2/2,5Kg approximately



FRONT



REAR

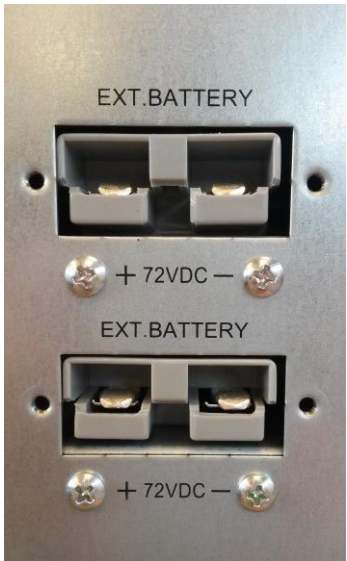

CONNECTION CONNECTORS

MODEL	BBR16U		
Cabinet Dimensions (WxDxH) mm	440	520	131 (3U)
Packing Dimensions (WxDxH) mm	580	665	275
Packing type	Carton box		
Cabinet Weight (Kg)	11 (WITHOUT BATTERIES)		
Weight with packing (Kg)	16 (WITHOUT BATTERIES)		
Color	Black		
Battery type	12V 7/9 Ah		
N° Max Batteries	16		
Output Voltage available (V)	24 / 36 / 48 / 72		
Breaker	1 x 50A 300Vdc		
Power supply	NO		
Connection	Connector		
Accessories	Base support for vertical fix UPS-Cabinet connection cable (200cm)		
Type of support	Base support / Rack		
Mounting arrangement	Vertical / Horizontal		


N.B. Max length of connection cable = 2 mt      Single battery weight 2/2,5Kg approximately



FRONT



REAR

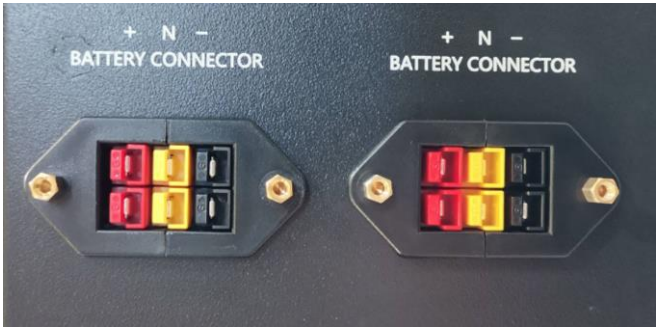

CONNECTION CONNECTORS



# Naicon

UNIT



Diloc



Elsist



Naicon srl Via il Caravaggio, 25 Trecella I 20060 Pozzuolo Martesana - Milano (Italy)  
Tel. +39 02 95.003.1 Fax +39 02 95.003.313 [www.naicon.com](http://www.naicon.com) e-mail: [naicon@naicon.com](mailto:naicon@naicon.com)